



## **Nitrous Express Burst Plates 15460 & 15461**

**Caution – EXTREME DANGER – Caution**

**Do not use or mix any other manufacturer's products with any Nitrous Express products.  
Do not use or mix any Nitrous Express products with any other manufacturer's products.**

**THESE INSTRUCTIONS APPLY TO NITROUS EXPRESS PRODUCTS ONLY!  
FOR SANCTIONED RACE USE ONLY - NOT FOR SALE OR USE IN CALIFORNIA**

**CAUTION: An experienced technician familiar with the use and handling of high-pressure cryogenic gases should install this system. If you have any doubt about your skills this system should be taken to a qualified shop for installation. If you have decided to do the install yourself please read and understand all of these instructions before you start. Some of these instructions may or may not apply to your vehicle, if you have any questions please call our tech department 940-767-7694 9:00A.M.-5:00P.M. CST.**

Although our burst plates are shipped pre-assembled, today we are going to go over the assembly of these plates step-by-step to ensure the best possible performance and safety in which these products are designed.




We will begin by laying out all of the items used to assemble your Nitrous Express Burst Plate.  
**(Illustration A)**

### Assembling The Plate

1. Using the (4) supplied o-rings, install them into the slot of which the burst panel will seat.  
**(Illustration B & C)**



2. Using the (8) supplied bolts, place a single spring (8) on each bolt (8).  
**(Illustration D)**

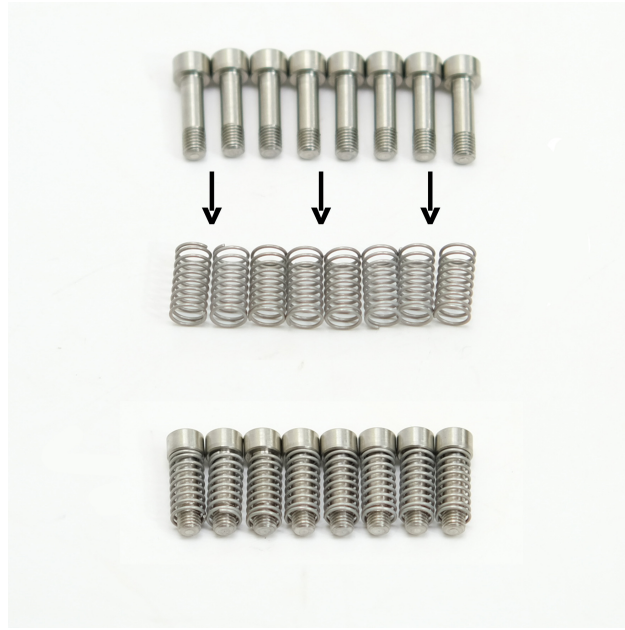

3. With our (4) o-rings installed, we will now individually install the (4) burst panels to the plate.  
Each burst panel requires (2) bolts and (2) springs.  
**(Illustration E)**



4. Repeat Step 3 on the remaining panels. Tighten each of the (8) supplied bolts to secure the (4) burst panels to the plate.

**(Illustration F)**



**Limited Warranty:** Nitrous Express (the warranter) hereby warrants its product to the original purchaser thereof (the consumer) against any and all defects in workmanship and material under the following terms and conditions: The Limited Warranty is specifically limited to the original purchaser of the products and is enforceable only by such original purchaser. In the event of a defect in workmanship or material of the products, the Warranter will repair or replace the product, or any defective part or parts thereof, at the election of the Warranter, without charge to the consumer for such repair or replacement. This Limited Warranty shall not apply to labor charges, freight, material or other incidental expenses in connection with removal and/or replacement of such defective product on the consumer's vehicle. This Limited Warranty shall extend for a period of ninety (90) days, commencing from the date of the original purchase by the Consumer. The only exception to this limited term is for the NX "Lightning" series solenoids, which have a limited lifetime warranty (does not include electrical components, labor, or freight). The maximum liability of Nitrous Express in connection with this warranty shall not under any circumstances exceed the contract price of the product claimed to be defective.

**Printing Errors:** Every effort has been made to proof all copy prior to printing. However, we do not accept responsibility for typographical errors either in prices or content.

**Rights Reserved:** As our technology expands, we may find it necessary from time to time to make changes in some of the items offered in our catalog. Nitrous Express reserves the right to make, without notice, changes in design, material and specifications or to make product changes without liability.

**Technical Assistance:** Trained experienced technicians are available to provide any information you may need between the hours of 9:00 a.m. to 4:00 p.m. CST. Call (940) 767-7694 for technical assistance.

 **WARNING: Cancer  
and Reproductive Harm -  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**